

PRODUCT INFORMATION

®Vinnolit MP 7151

Vinnolit MP 7151 GreenVin® | Vinnolit MP 7151 GreenVin® bio-attributed


PVC for paste application

Brief Description

®Vinnolit MP 7151 is a fine grained PVC homopolymer with a medium emulsifier content. It yields plastisols exhibiting a very low viscosity at low/high shear rates and a Newtonian flow characteristic even at low plasticizer contents (40 - 60 phr).

Plastisols with ®Vinnolit MP 7151 show a very low viscous, homogeneous flow behavior and very high filler tolerance, which makes it perfectly useful for higher speed coating process, e.g. in flooring base coatings, rotary screen printing applications as well as for textile base coats. Additionally, a very good

pot life characteristic and good thermo-stability bringing added value in that fields of application.

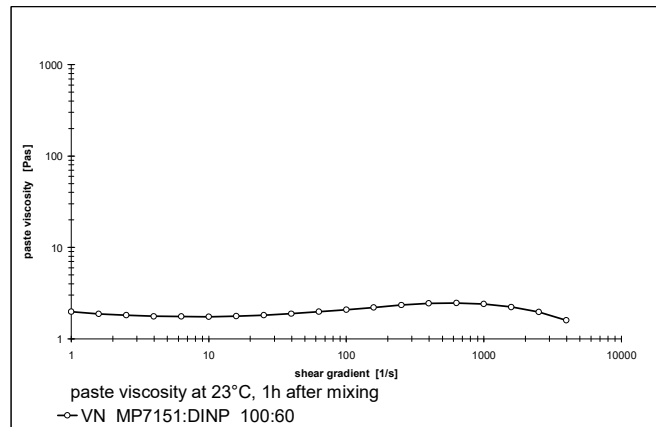

RAW MATERIAL PROPERTIES	TYPICAL VALUE*)	UNIT	TEST METHOD	
			DIN EN ISO	ISO
K-value	71	-	1628-2	1628-2
Reduced viscosity	128	ml/g	1628-2	1628-2
Apparent bulk density	0.370	g/ml	60	60
Particle size distribution: sieve retention • retained on 0.063 mm screen	≤ 0.5	%	-	-
Volatile matter	≤ 0.35	%	1269	1269
Emulsifier content	medium	-	-	-

*) The values given above are **typical** test results which should be used as a guide only. They do not form the whole or part of a specification or guarantee.

Processing and Application

Plastisols containing ©Vinnolit MP 7151 can be processed with all common technologies.

©Vinnolit MP 7151 produces plastisols, which are ideal for the manufacture of highly filled/ high solids compact coatings. As the polymer has a fine particle size, it is especially suitable for thin coatings on fabric or paper producing a semi-gloss surface finish.

©Vinnolit MP 7151 plastisols can also be applied by high-speed reverse roll or rotary screen coating processes.

©Vinnolit MP 7151 shows the following outstanding **properties**:

- Very low paste viscosity, even over longer times (storage stability)
- High filler tolerance
- Good compatibility with common adhesion promoter
- Good adhesion to textile fabrics

The main **applications** are:

- The production of compact vinyl wallpaper base with low coating weights, both on high speed reverse-roll coating lines and on rotary screen coating lines. High solid content plastisols exhibiting Newtonian flow characteristics at very high shear rate.
- Very low viscosity plastisols with high filler loading for fabric impregnation e.g. in conveyor belting carcasses, flooring and carpet tile backings
- Glass fleece impregnation for flooring base coatings
- Dip coating

Packaging, Delivery and Storage

The product is supplied in 25 kg bags as well as in bulk form.

©Vinnolit MP 7151 should be stored dry and away from direct or indirect sources of heat. Please consult the safety data sheet for information about the safety precautions necessary for transport, storage, blending and processing.

General Information

Further processing information and recommendations can be obtained from our Technical Service department.

Vinnolit MP 7151 GreenVin® is produced with 100% renewable electricity (GOs). Additionally, renewable Ethylene is used for Vinnolit MP 7151 GreenVin® bio-attributed. See GreenVin® info sheet.

The data and recommendations contained in this product information represent the current state of our knowledge and serve as a guide only to our products and their potential applications. Therefore, no warranty of specific properties of the products mentioned here in nor of their suitability or fitness for a particular purpose is implied.

The information given in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also used.

Patent or other proprietary rights of third parties must be observed. The quality of our products is warranted under the terms of our General Conditions of Sale.

Ismaning, January 2023

Westlake Vinnolit GmbH & Co. KG

Carl-Zeiss-Ring 25

85737 Ismaning

Germany

Tel.: +49 (0)89 9 61 03-0

Fax: +49 (0)89 9 61 03-103

www.westlakevinnolit.com